

MINITEMP™

Portable Infrared Thermometer



Noncontact Temperature Measurement

The MiniTemp™ IR thermometer—a new way to solve common problems.

Infrared (IR) thermometers have become the preferred tool for diagnostics and inspection. Raytek IR thermometers are valued by professionals in a variety of industries—from industrial maintenance to food service, because they quickly, accurately and safely measure surface temperature! Anywhere that temperature is a factor in process, product quality or diagnostics, a Raytek IR thermometer should be close at hand.

IR thermometers are easy to use, and since they don't contact the object being measured, they are the safest way to measure hot, hard-to-reach, or moving parts, while eliminating potential damage and contamination.

The Raytek MiniTemp MT2 and the MiniTemp MT4 are entry-level IR thermometers that incorporate many of the same features found in professional IR thermometers. The MiniTemp is perfect for auto enthusiasts performing self diagnostics and for those tackling home improvement projects. Use it for spotting costly energy losses around windows and doors, monitoring critical temperatures in kitchen or workshop, or ensuring that your environment is comfortable and safe.

Just pull the trigger! The MiniTemp shows the temperature in an instant on its large, backlit display. The simple to use MiniTemp becomes even easier to operate when aiming with the Laser Point™ (MT4). The Raytek MiniTemp: Smart, Simple, Safe—Convenient!

- Simple to use
- Instant readings
- Laser Point™ (MT4)
- Large, easy to read display
- Temperature Range -10° to 260°C (0° to 500°F)
- °C or °F selectable
- 1-year warranty




Raytek®

MINITEMP Specifications

Temperature range	-18 to 260°C (0 to 500°F)
Accuracy	-1°C (30°F) to 260°C (500°F) ±2% or ±2°C (±3.5°F) whichever is greater -18°C (0°F) to -1°C (30°F) ±3°C (±5°F)
Repeatability	±2% of reading, or ±2°C (±3°F), whichever is greater
Response time	500 mSec, 95% response
Spectral response	7-18 μm
Emissivity*	pre-set 0.95
Ambient operating range	0 to 50°C (32 to 120°F)
Relative humidity	10-95% RH noncondensing, @ up to 30°C (86°F)
Storage temperature	-20° to 65°C (-4° to 150°F) without battery
Weight / Dimensions	227 g (0.5 lb); 152 x 101 x 38 mm (6 x 4 x 1.5 in)
Power	9V Alkaline or NiCd battery (included)
Battery life (Alkaline)	22 hrs (MT2) 12 hrs (MT4)
Distance to Spot Size	6:1
Laser Class II	No (MT2) Yes (MT4)
Typical Distance to Target (Spot)	Up to 1m or 3 ft
Distance to Spot (D:S)	6:1
Warranty	1 year
Additional Options/Accessories	Nylon Holster


*For more information on emissivity for unique applications visit www.raytek.com/emissivity.htm

Optical Resolution

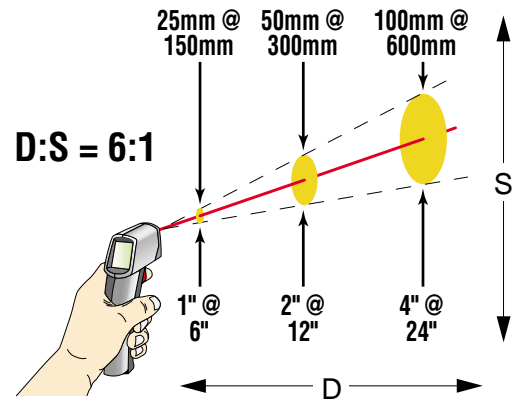

The MiniTemp is intended for close range targets, measuring a minimum target area of 1 inch in diameter out to a distance of approximately 6 inches, and has a 6 inch target measurement area at 3 feet.

Laser Sighting

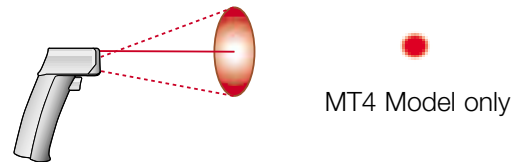

Laser Point™ Single-point laser indicates the approximate center of the target spot.

Worldwide Headquarters

Raytek Corporation
1201 Shaffer Rd. PO Box 1820
Santa Cruz, CA USA
Tel: 1 800 866 5478
1 831 458 1110
Fax: 1 831 425 4561
portable@raytek.com

Raytek de Mexico, S.A. de C.V.
Puebla, Pue. Mexico
Tel: 52 222 230 4380
Fax: 52 222 230 4438
ventas@raytek.com.mx

Raytek China Company
Beijing, China
Tel: 86 10 6439 2255
Fax: 86 10 6437 0285
info@raytek.com.cn

Raytek Japan, Inc.
Osaka, Japan
Tel: 81 6 4390 5015
Fax: 81 6 4390 5016
info@raytekjapan.co.jp

South American Headquarters
Raytek do Brasil
Sorocaba, SP Brasil
Tel: 55 15 32176046
Fax: 55 15 32175694
info@raytek.com.br

European Headquarters

Raytek GmbH
Berlin, Germany
Tel: 49 30 4 78 00 8 400
Fax: 49 30 4 71 02 51
info@raytek.de

Raytek UK
Milton Keynes, United Kingdom
Tel: 44 1908 630800
Fax: 44 1908 630900
ukinfo@raytek.com

Raytek France
Palaiseau, France
Tel: 33 1 64 53 15 40
Fax: 33 1 64 53 15 44
raytek@wanadoo.fr

Raytek
Worldwide



© 2001 Raytek Corporation (1-1101/Rev. B) 12/2001
Raytek and the Raytek logo are registered trademarks, and MiniTemp and Laser Point are trademarks of Raytek Corporation. Specifications subject to change without notice.

www.raytek.com

for up-to-the-minute features

Raytek®